

WAVES HERRINGBONE

ESSENCE

PREMIUM CUSTOM MADE PARQUET COLLECTION

PATTERN / MODEL / LAYING PATTERN


COLLECTION	WAVES
Pattern	Herringbone
Wood Species	European Oak
Grade	Elegant / Standard
Surface Machining	Sanded / Brushed / Handscraped / Sawn Brushed
Finish	Oiled
Constructions	multi-layered engineered parquet
Size	14/3 x 160 x 605 mm
Joint	T&G
Installation type	Full surface glued down
Underfloor Water Heating	Suitable*



*read installation instructions - underfloor heating protocol

BILL OF MATERIAL

Packaging contains 18 planks, (9 x left and 9 x right).

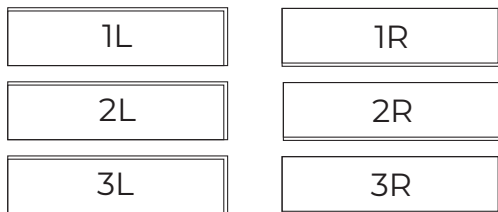

(measurements in mm)

CONSTRUCTION

DIMENSIONS	
Thickness	14 mm
Width	160 mm
Length	605 mm
Toplayer thickness	3 mm
Top layer construction	Solid wood (European Oak)
Core thickness	11 mm
Core construction	Plywood (Birch)
Microbevel	0,3 mm
Joint type	Tongue and Groove (T&G)

PACKAGING	BOX
Content	18 pcs (9 x left and 9 x right)
Area content	1,742 m ²
Weight	14 kg
H x W x L	90 x 375 x 640 mm

STORAGE AND USAGE



- Air humidity 45 % - 60 %
- Floor temperature +20 ° - +22 °
- Air temperature 18 ° - 24 °

FINISH

SANDED

Smooth surface, sanded and protected with oil, preserving the natural appearance of wood.

BRUSHED

Soft wood removed from the surface with brush rollers so that only hard wood remains. The surface is harder and more resistant to scratches and impacts.

HANDSCRAPED

Slightly wavy surface. Boards are protected with oil, maintaining the authentic, rustic appearance of wood.

SAWN BRUSHED

Emphasized natural wood texture, protected with oil. Significantly increased durability and resilience.




GRADE

PROPERTY	ELEGANT	STANDARD
General description	Wood selection with a completely uniform plank structure and color. Small knots are allowed. Cracks are not allowed.	Planks with a natural color diversity and instances of sapwood; knots can be more frequently present, smaller cracks are sealed with a black or natural-colored filler.
Color variation	Homogeneous	Homogeneous, natural contrast
Sound knot	Permitted - smaller	Permitted
Black knot (not in groups)	Permitted - smaller	Permitted
Cracks	Not permitted	Smaller ones are allowed, filled with black or natural-colored filler.
Tangential board	Permitted	Permitted
Rough wooden structure	Permitted individually	Permitted
Cross grained wood	Permitted individually	Permitted
Holes made by insects and blue stain	Not permitted	Not permitted
Sapwood	Not permitted	Permitted
End knots	Permitted individually	Permitted individually

INSTALLATION



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

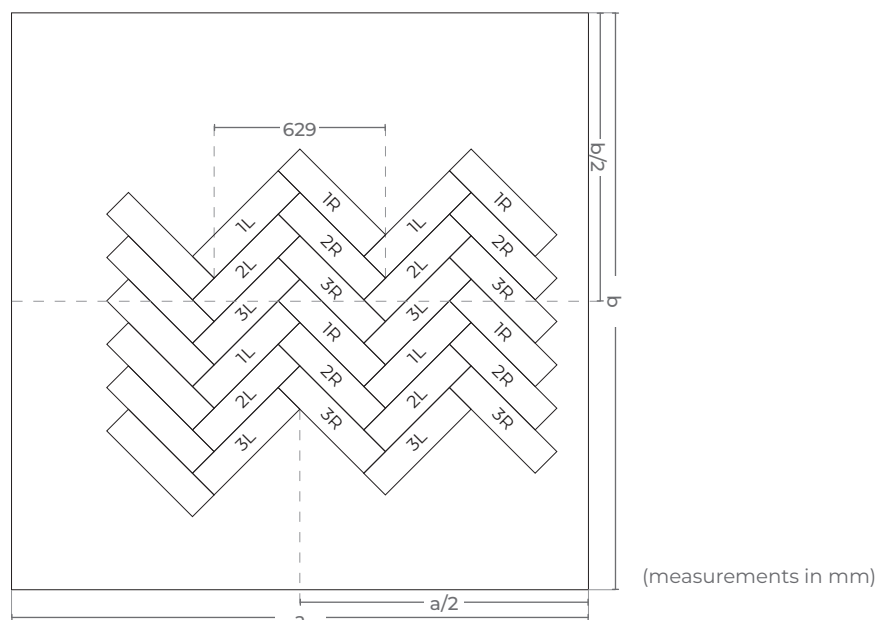

MAINTENANCE AND CARE CONDITIONS

Maintenance of hardwood Floors with Silk finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar products. Floor surface areas that receive the most trac and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with special Coswick Restorative Oil. This product restores the protective surface. Frequency of use depends on type of interior and intensity of foot trac. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot trac, it is recommended to use the product 2-4 times a year.

Signed for and on behalf on the manufacturer by:

Anže Kranjec,
Podskrajnik, 31. 01. 2025




WAVES HERRINGBONE

ESSENCE

PREMIUM CUSTOM MADE PARQUET COLLECTION

PATTERN / MODEL / LAYING PATTERN


COLLECTION	WAVES
Pattern	Herringbone
Wood Species	American Walnut
Grade	Natural
Surface Machining	Brushed
Finish	Oiled
Constructions	multi-layered engineered parquet
Size	14/3 x 160 x 605 mm
Joint	T&G
Installation type	Full surface glued down
Underfloor Water Heating	Suitable*

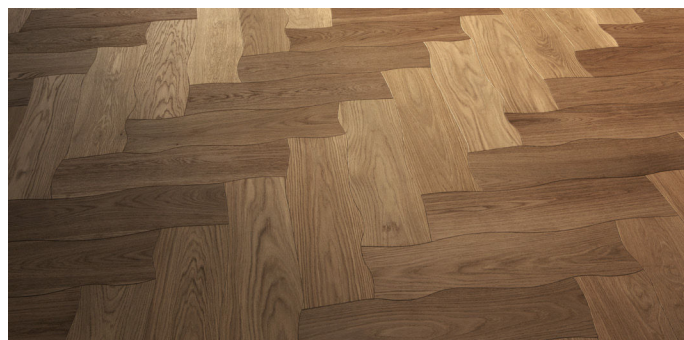

*read installation instructions - underfloor heating protocol

BILL OF MATERIAL

Packaging contains 18 planks, (9 x left and 9 x right).

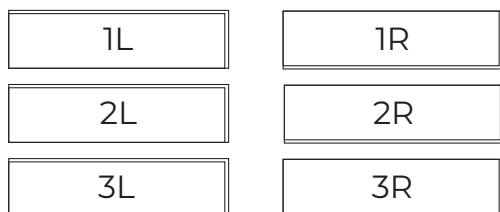

(measurements in mm)

CONSTRUCTION

DIMENSIONS	
Thickness	14 mm
Width	160 mm
Length	605 mm
Toplayer thickness	3 mm
Top layer construction	Solid wood (American Walnut)
Core thickness	11 mm
Core construction	Plywood (Birch)
Microbevel	0,3 mm
Joint type	Tongue and Groove (T&G)

PACKAGING	BOX
Content	18 pcs (9 x left and 9 x right)
Area content	1,742 m ²
Weight	15 kg
H x W x L	90 x 375 x 640 mm

FINISH

BRUSHED

Soft wood removed from the surface with brush rollers so that only hard wood remains. The surface is harder and more resistant to scratches and impacts.

STORAGE AND USAGE



- Air humidity 45 % - 60 %
- Floor temperature +20 ° - +22 °
- Air temperature 18 ° - 24 °



BRUSHED


GRADE

PROPERTY	NATURAL
General description	Boards with a uniform structure, combined with boards with natural wood color diversity.
Color variation	Homogeneous, natural contrast
Sound knot	Permitted - smaller
Black knot (not in groups)	Permitted - smaller
Cracks	Smaller ones are allowed, filled with black or natural-colored filler.
Tangenital board	Permitted
Rough wooden structure	Permitted
Cross grained wood	Permitted
Holes made by insects and blue stain	Not permitted
Sapwood	Permitted - smaller
End knots	Permitted

INSTALLATION



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

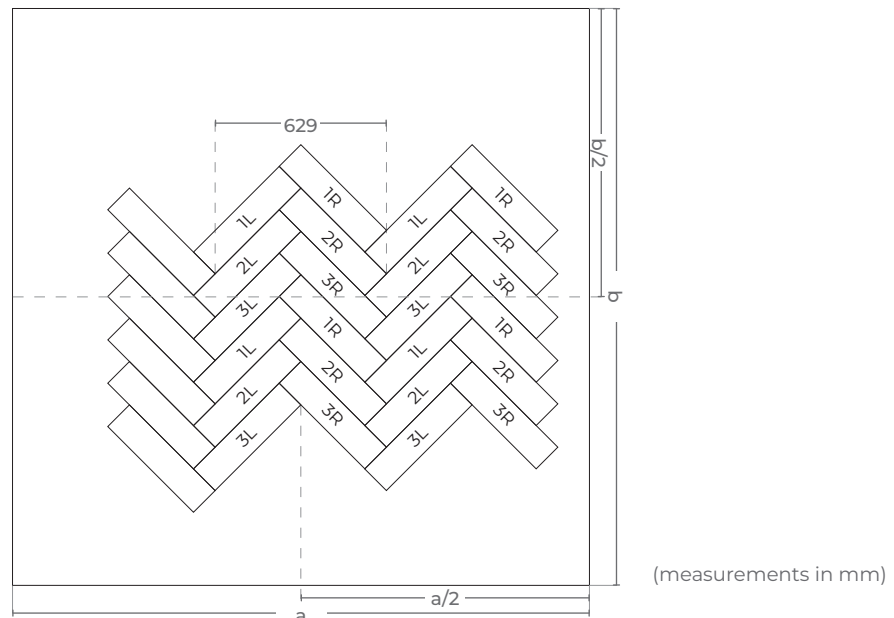

MAINTENANCE AND CARE CONDITIONS

Maintenance of hardwood Floors with Silk finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar products. Floor surface areas that receive the most trac and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with special Coswick Restorative Oil. This product restores the protective surface. Frequency of use depends on type of interior and intensity of foot trac. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot trac, it is recommended to use the product 2-4 times a year.

Signed for and on behalf on the manufacturer by:

Anže Kranjec,
Podskrajnik, 31. 01. 2025


Podskrajnik 112 / 1380 Cerklje ob nočnem




ALPOD

MADE IN
EU

www.alpod.eu/essence-parquet-flooring